



Chinese Society of Aeronautics and Astronautics  
& Beihang University

Chinese Journal of Aeronautics

cja@buaa.edu.cn  
www.sciencedirect.com



FULL LENGTH ARTICLE

# Modeling and analysis of mover gaps in tubular moving-magnet linear oscillating motors

Xuesong LUO<sup>a</sup>, Chao ZHANG<sup>a,\*</sup>, Shaoping WANG<sup>a</sup>, Enrico ZIO<sup>b</sup>,  
Xingjian WANG<sup>a</sup>

<sup>a</sup> School of Automation Science and Electrical Engineering, Beihang University, Beijing 100083, China

<sup>b</sup> Energy Department-Nuclear Section, Polytechnic of Milan, Via Ponzio 34/3, I-20133 Milan, Italy

Received 20 January 2017; revised 14 March 2017; accepted 12 April 2017

## KEYWORDS

Air-gap flux density;  
Linear motor;  
Mover gaps;  
Quasi-Halbach array;  
Thrust output;  
Tubular moving-magnet  
linear oscillating motor  
(TMMLOM)

**Abstract** A tubular moving-magnet linear oscillating motor (TMMLOM) has merits of high efficiency and excellent dynamic capability. To enhance the thrust performance, quasi-Halbach permanent magnet (PM) arrays are arranged on its mover in the application of a linear electro-hydrostatic actuator in more electric aircraft. The arrays are assembled by several individual segments, which lead to gaps between them inevitably. To investigate the effects of the gaps on the radial magnetic flux density and the machine thrust in this paper, an analytical model is built considering both axial and radial gaps. The model is validated by finite element simulations and experimental results. Distributions of the magnetic flux are described in condition of different sizes of radial and axial gaps. Besides, the output force is also discussed in normal and end windings. Finally, the model has demonstrated that both kinds of gaps have a negative effect on the thrust, and the linear motor is more sensitive to radial ones.

© 2017 Production and hosting by Elsevier Ltd. on behalf of Chinese Society of Aeronautics and Astronautics. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

## 1. Introduction

Tubular moving-magnet linear oscillating motors (TMMLOMs) are specific linear actuators that produce a high-frequency reciprocating motion. Their outstanding characteristics, such as efficiency, dynamic performance, and

simple structure, give their broad application prospect, but their model has not been clearly described and their structure has not been optimized adequately. TMMLOMs work at a designed frequency with the stroke of mover oscillating no more than one pole pitch, which are widely applied in many equipment, such as artificial hearts, compressors, refrigerators, etc.<sup>1-5</sup> As short-travel actuations are propelled directly without conventional cranks, TMMLOMs enjoy a 20%-30% better efficiency compared with rotary motors in the application of household refrigerator compressors.<sup>5</sup> By enlarging the power whilst reducing acoustic noise and vibrations accordingly, TMMLOMs are tested for air-conditioner compressors with an efficiency of over 92% at a rated condition.<sup>6</sup> Due to a relatively higher frequency response benefited from the absence

\* Corresponding author.

E-mail address: [czhangstar@gmail.com](mailto:czhangstar@gmail.com) (C. ZHANG).

Peer review under responsibility of Editorial Committee of CJA.



Production and hosting by Elsevier

of rotor inertia in the rotary mechanism, TMMLOMs are developed to drive the servo pump in a hydraulic system.<sup>7</sup> Meanwhile, TMMLOMs are utilized in linear electro-hydrostatic actuators in more-electric aircraft systems with a high power density.<sup>8</sup> In addition, a cooperative configuration is introduced where two movers of dual TMMLOMs work with a phase angle of  $\pi/2$ .<sup>9</sup> A reliable coordinated control of two TMMLOMs requires a regulation based on an accurate model. Furthermore, a powerful output with limited space and restricted mass in aircraft also needs more optimized analysis of the motor structure and principle based on a precise calculation of the air-gap magnetic field. A comprehensive model, therefore, is indispensable for TMMLOMs.

Some well-known modeling optimization approaches, such as changing the direction of magnetization on a mover, configuring the groups of PM arrays on movers, decreasing the slots of the stator, and regulating the split ratio of E-Core PMs, have been confirmed to improve the characteristics of TMMLOMs. However, current research pays little attention to the effects of mover gaps (air gaps among PMs or between PMs and materials) which exist inherently in the segments of PMs. Despite the fact that the effects of discontinuity on PMs has not been proven to be very prominent, an introduction of their effects on the distribution of a magnetic field through an analytical mathematics and simulation model is also a necessity when aiming to optimize a TMMLOM for a high-performance aeronautical facility and create a dual-motor collaborative control strategy on this basis.

Many studies about the TMMLOMs have been published over the last three decades, focusing on improving the output performance analytically and experimentally through reducing the mover weight and increase the frequency.<sup>3,4</sup>

The topology of PMs is an important factor that influences the output performance. Kim et al. proposed a linear oscillatory actuator whose magnetization direction of PMs was parallel to the stroke axis,<sup>10</sup> and the machine shared a high-power density and a low-cogging force. A transient model of this motor was validated experimentally.<sup>11</sup> In the contrary, Kim et al. discussed a TMMLOM with its magnetization direction perpendicular to the motion direction.<sup>12,13</sup> The magnetic field was analyzed by an analytical model, and the prototype gave capabilities of high force density and low detent force. By the ways of magnetic vector potential and cylindrical coordinate formulation, Wang et al. presented a general framework for TMMLOMs. His solutions presented the analytical field distribution for both axial polarized and radial polarized tubular linear PM motors.<sup>14</sup> The air-gap flux densities of both topologies were compared,<sup>15</sup> and a finite element model showed that the radial attractive force was higher in the axial polarized structures when considering the eccentricity effect.

In a publication series presented by Wang et al., a quasi-Halbach structure of TMMLOMs which was a combination of radial polarized and axial polarized PMs arrays was deeply analyzed,<sup>14,16-19</sup> including an analytical flux expression of the quasi-Halbach topology,<sup>14,16,18</sup> comparative analysis to conventional magnetization methods,<sup>17</sup> and parameters optimizations on the size of the structure.<sup>19</sup> Because of some self-shielding property, the quasi-Halbach PM arrays would reduce the moving mass to improve the dynamic capability and result in a higher flux density.

The coupling between windings and PMs is another area that researchers have focused on. Considering the

configuration of stator windings in TMMLOMs, Wang et al. deduced a set of formulations to describe the distribution of magnetic flux theoretically based on Maxwell's equations.<sup>16</sup> Zhu et al. studied a variety of winding arrangements with a PMs assembly.<sup>20-24</sup> A rule was outlined that the stator tooth number was supposed to differ the mover pole number by 1 in TMMLOMs.<sup>20</sup> Subsequently, simulation calculations and experiment validations were finished by Zhu et al., which demonstrated that the E-core wind configuration yielded less flux leakage and performed conducive to the oscillation.<sup>20,22</sup> Eventually, design optimization and prototype validation was implemented for the topology of a TMMLOM with E-type windings and quasi-Halbach PMs.<sup>23,24</sup> This type of motor was further extended into E-type series TMMLOMs,<sup>25</sup> which consisted of multi-pair E-cores with a quasi-Halbach topology to enhance the thrust. Furthermore, Jiao et al. presented compound Halbach PMs in a TMMLOM, whose topology was a dual-layer integration of quasi-Halbach PMs and axial polarized PMs.<sup>26</sup> In Jiao's structure, the conventional back-iron was not needed any more, hence the mover mass could be decreased further with a better dynamic performance.

To improve the properties of a TMMLOM, a stator slot was taken into account by researchers. Bianchi et al. analyzed the factor of a stator slot that affected the force.<sup>15</sup> His research showed that slotless motors shared a higher mean force than slotted ones. Kim et al. designed a slotted TMMLOM<sup>13</sup> and a slotless TMMLOM<sup>12</sup> for an eco-pedal system, and the later presented a smaller force ripple experimentally. An analytical model with a quasi-Halbach magnetized armature and a semi-closed slot stator was given by Chen et al.,<sup>23</sup> and a closed slot structure was employed into a TMMLOM to reduce the cogging force in Liang's paper,<sup>7</sup> of which the leakage permeability was much larger than that of the former. Besides, Kim et al. proposed a novel method for stator lamination to laminate the teeth and yoke of a stator respectively, which decreases the gaps in the stator and multiplies the flux density.

By introducing a Carter coefficient, Wang et al. modified the analytical model of tubular linear PM motors with a slotted stator<sup>14</sup> and a semi-closed slotted stator.<sup>27</sup> They also applied this correction to calculate the distribution of flux density of a TMMLOM with quasi-Halbach PMs. This method was also followed by Wang et al. to model the E-type series TMMLOMs.<sup>28</sup>

Experimental, numerical, and analytical methods are the three normal research approaches on LMMLOM research. Some studies have been implemented entirely experimentally,<sup>6,10,29,30</sup> whose results could exhibit the performance of a motor directly. However, they didn't reveal the principle of LMMLOMs. Numerical approaches have been widely applied in LMMLOM designs,<sup>7,17,31-35</sup> which allow to solve a complex design without much approximation. However, it didn't reflect the relation between topological parameters and the motor performance, which results in a difficulty in optimization.

The key step to model a TMMLOM is to describe the distribution of magnetic flux, resulting from which that analytical methods can be grouped into three categories. One is lumped magnetic circuit models,<sup>7,24,36-38</sup> which consider a motor made of several parts with individual magnetic parameters, and they can only model the motor roughly due to the lumped approximation method. Another choice is the equivalent surface current method, which introduces several layers of surface current to take the place of PMs.<sup>37</sup> Its approximate structure can only

outline the regularities of PMs with a simple geometric form. The last one is the analytical solution from Maxwell's equations,<sup>16,18,23,25,28</sup> that shares a better approximation of the real magnetic flux. It is restricted that indispensable approximate conditions need be set to ensure the model solvable.

An accurate model depends on the numbers of factors which should be taken into account during modeling. Most of the literature studied TMMLOMs, and took the configurations of mover PMs and stator topology into consideration. The flux density in the air-gap determines the output capacity of the motor. A quasi-Halbach PMs array proves its better performance in the flux density due to the self-shielding property, and its model has been analyzed in detail.<sup>16–24,28</sup> It produces a larger flux distribution with an equal mover mass, which can increase properties of both thrust and dynamic. Reduction of the stator slot, in addition, is also an effective approach to improve the flux distribution, whose model has also drawn a lot of focus from researchers,<sup>7,14,15,17,23,26,27</sup> because permeability is quite sensitive to air medium.

Air medium also exists in the mover of a TMMLOM, the surface of which is assembled by several individual PM modules. The manufacturing method results in some gaps among PM arrays as well as between PMs and the mover frame. Bianchi analyzed that the magnetic flux could move through the small air-gap in an axial magnetized mover causing a radial force.<sup>15</sup> However, he just focused on the radial force in a TMMLOM by the method of finite element and didn't give a model to explain how the gaps affected the flux distribution. Via analytical analysis,<sup>39</sup> Xia et al. presented the negative influence caused by gaps between Halbach PM segments in rotary motors, discussing the relationship between the effect of gaps and the parameters of PMs through an analytical model. In Xia's paper, however, the gaps were only investigated in a circumferential dimension. Similar to rotary motors, mover gaps also exist in linear motors as well as TMMLOMs, whose gaps are more complex than those of rotary machines because of a more complex structure in the mover. The surface of the mover is mounted by PM segments including radial polarized ones and axial polarized ones. Due to the installation error, the stuffed glue, and the interaction force among PMs, gaps are inevitable between and beneath segments in quasi-Halbach arrays. The existence of gaps would affect the magnetic flux distribution and output thrust. Therefore, the thrust model of TMMLOMs considering mover gaps is a necessity for designing a high-precision control strategy.


In this paper, Section 1 introduces the problem statement of TMMLOMs. Section 2 establishes a modeling method considering the mover gaps. Section 3 gives model validation and performance analysis. Finally, conclusions are presented in Section 4.

## 2. Schematic structure

In this section, the structure of a TMMLOM is clarified for further understanding. Subsequently, the existence of gaps in the mover is presented in detail.

### 2.1. Structure of a TMMLOM

The structure of a TMMLOM consisting of 4 pairs of E-type windings with a quasi-Halbach PMs configuration is shown in

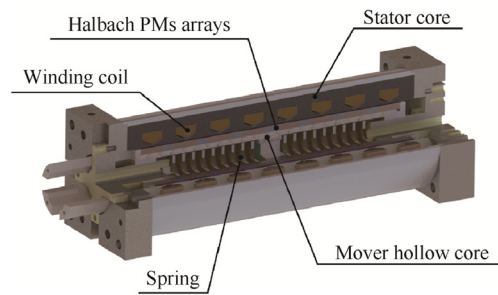

**Fig. 1** Structure of a TMMLOM.


**Fig. 1.** The Material of PMs is NdFeB N38SH. Silicon steel is laminated circumferentially to make up the stator core, and coils are connected in parallel through the stator, while the hollow mover is made of electrical iron with PMs covered on the surface. Including radial polarized PMs and axial polarized PMs, a quasi-Halbach array can enhance the magnetic flux over the outer surface of the mover resulting from its self-shielding effect. The stroke of this machine is designed to be 5 mm in maximum.

The hollow core lightens the mover mass, which enables the TMMLOM to work at a high frequency of 100 Hz. Moreover, this design also improves the dynamic performance. High power and good dynamic response make it possible to meet the requirements of an aircraft actuator.

### 2.2. Gap topology

As shown in Fig. 2 and Fig. 3, all the individual PM segments assembled on the mover core can be classified into two types. An axial polarized PM segment is a torus whose magnetization direction is along the  $z$ -axis. A radial polarized PM segment is a radial magnetized one, which was fabricated with a tile-like shape as well as a central angle of  $60^\circ$ .

Gaps are very clear between these segments as marked in Fig. 2. In the installation process of Quasi-Halbach arrays, the adhesive would take up less room inevitably between PMs. In addition, the design tolerance as well as the interaction force between segments will also account for the assembly gaps. For the permeability in non-ferromagnetic gaps is different from that in ferromagnetic ones, the existence of gaps will affect the distribution of the magnetic flux. Allowing for the structure of Quasi-Halbach segments, the gaps mentioned above can be divided into three categories, i.e., radial gaps, axial gaps, and circumferential gaps, which are illustrated in Fig. 3.  $x, y, z$  are three axes in Cartesian coordinate system and  $r, \theta, z$  are axes in cylindrical coordinate system, where  $e_{ra}, e_{ci}, e_{ax}$  are the unit vectors in radial, circumferential and

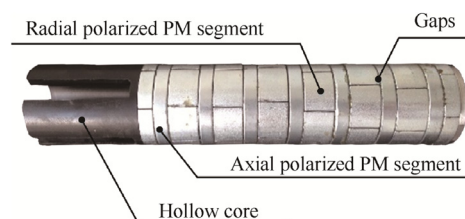

**Fig. 2** Mover prototype.

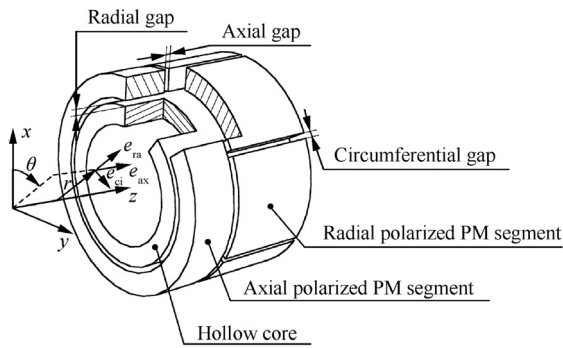


Fig. 3 Mover structure.

axial directions respectively. Radial gaps exist between PMs and the hollow core, axial gaps between axial polarized PMs and radial polarized PMs, and circumferential gaps between tile-like PMs. The three kinds of gaps have individual effects on the magnet flux, and subsequently, the characteristics of radial and axial gaps are about to be discussed in the following section.

### 3. Mathematical model considering mover gaps

In this section, an analytical model is yielded in cylindrical coordinates by the method of magnetization vector. Based on Laplace's and Poisson's equations, radial and axial gaps are taken into consideration. Moreover, boundary conditions are presented and the distribution of the magnetic flux is deduced in the air-gap. On this basis, an output thrust model is given.

#### 3.1. Model assumption and magnetization vector

To research the effect of gaps in the mover on the air-gap magnetic field, it's necessary to build an analytical model consider-

ing the gaps, and in order to simplify the derivation of the analytical model, some assumptions are stated here.

- (1). The axial length of the theoretical model is infinite. It comprises a series of repetitive permanent magnet armatures in the TMMLOM extending to infinity, which facilitates a Fourier series representation, and the cycle length is much longer than the length of the motor.
- (2). Each individual permanent magnet shares the same size and magnetic property with a smooth surface, and the gaps of the same type have the same thickness.
- (3). The analytical model ignores the saturation phenomenon.
- (4). A Carter coefficient will be introduced to compensate the impact of the stator slot.
- (5). The stator and the hollow core are infinitely permeable while the relative permeability of PMs is approximated as 1.

In formulation of the magnetic field, the room to be studied is divided into the following three regions based on magnetic characteristics, as shown in Fig. 4.

- (1). Region I is the space of the air-gap.
- (2). Region II denotes the permanent magnets arrays filled with a rare-earth magnetic material with axial gaps.
- (3). Region III represents the radial gaps between the permanent magnets and the hollow core.

$g_{ra}$  and  $g_{ax}$  are radial and axial gap in Fig. 4,  $\tau_w$  the width of stator winding,  $b_t$  the width of stator teeth,  $g$  the length of air-gap,  $\tau_{ra}$  length of radially magnetized PMs,  $\tau_{ax}$  length of axially magnetized PMs,  $\tau_p$  the pole pitch,  $R_s$  the outer radius of mover,  $R_h$  the outer radius of mover hollow core and  $R_{sh}$  the inner radius of mover hollow core. The magnetic field properties in the three regions are characterized by an expression between the magnetic field intensity  $H_I, H_{II}, H_{III}$  (in A/m) and the magnetic flux density  $B_I, B_{II}, B_{III}$  (in Tesla) as

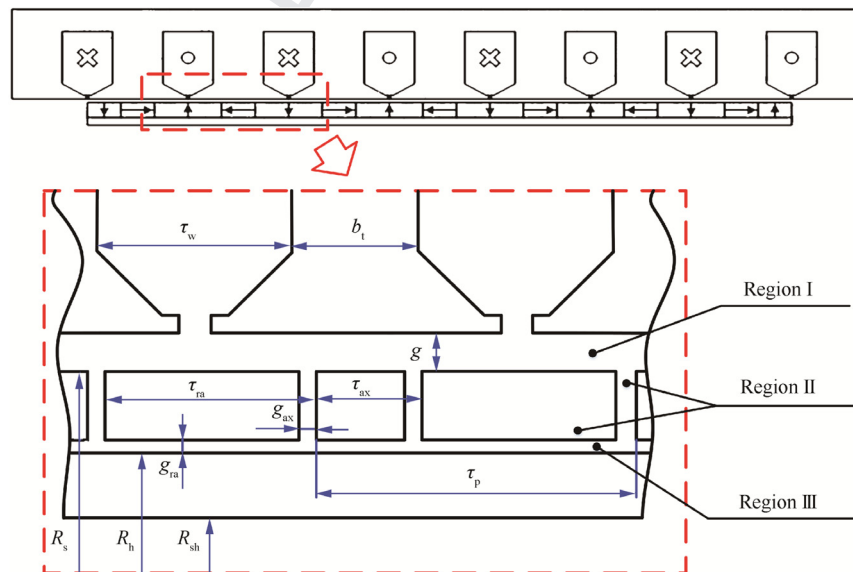


Fig. 4 Magnets topology and leading parameters of TMMLOM.

$$\begin{cases} \mathbf{B}_I = \mu_0 \mathbf{H}_I \\ \mathbf{B}_{II} = \mu_0 \mu_{rII} \mathbf{H}_{II} + \mu_0 \mathbf{M}_0 \\ \mathbf{B}_{III} = \mu_0 \mathbf{H}_{III} \end{cases} \quad (1)$$

where  $\mu_0$  is the permeability of vacuum with a value of  $4\pi \times 10^{-7}$  H/m,  $\mu_{rII}$  the relative permeability of PMs, and  $\mathbf{M}_0$  the residual magnetization vector in A/m.

The magnetization vector  $\mathbf{M}$  of the PMs array can be expressed in the cylindrical coordinates as

$$\mathbf{M} = M_{ra} \mathbf{e}_{ra} + M_{ax} \mathbf{e}_{ax} \quad (2)$$

where  $M_{ra}$  is the radial components of the magnetization vector,  $M_{ax}$  the axial components of the magnetization vector. Their spatial distributions are shown in Fig. 5 where  $M_0$  is the absolute value of magnetization vector which is given by

$$M_0 = \frac{B_{re}}{\mu_0} \quad (3)$$

where  $B_{re}$  is the magnet remanence of permanent magnets. Equations of  $M_{ra}$  and  $M_{ax}$  derived from the configuration of PMs as shown in Fig. 5, where  $R_{sc}$  is the effective stator inner radius,  $R_m$  is the effective PMs inner radius, and  $R_p$  is the effective hollow core outer radius.

They can be resolved into Fourier series, which are given by

$$\begin{cases} M_{ra} = \sum_{k=1}^{\infty} a_k \cos(m_k z) \\ M_{ax} = \sum_{k=1}^{\infty} b_k \sin(m_k z) \end{cases} \quad (4)$$

where  $m_k = \frac{2k\pi}{\tau_{ip}}$ ,  $z$  the axial position, and  $\tau_{ip}$  the cycle length utilized in the Fourier series. Define that  $C_{ax1} = \frac{\tau_{ra} - g_{ax}}{2}$  and  $C_{ax2} = \frac{\tau_{ra} + g_{ax}}{2}$ , and the coefficients are determined as

$$\begin{cases} a_k = \frac{2B_{re}}{\mu_0 k \pi} \{-\sin(m_k C_{ax1}) + \sin(m_k \tau_p) - \sin[m_k(\tau_p - C_{ax1})]\} \\ b_k = \frac{2B_{re}}{\mu_0 k \pi} \{\cos(m_k C_{ax2}) - \cos[m_k(\tau_p - C_{ax2})]\} \end{cases} \quad (5)$$

### 3.2. Distribution of flux density

According to the fundamental theory of an electromagnetic field, the magnetic field in the TMMLOM is a solenoid field or source-free field, namely,

$$\nabla \cdot \mathbf{B}_i = 0 \quad (6)$$

where  $i = I, II, III$  that represent the three regions. It can be derived that for any vector, the divergence of its curl is always equal to zero. Thus, a magnetic vector potential  $A_i$  in region  $i$  can be introduced, so that

$$\mathbf{B}_i = \nabla \times \mathbf{A}_i \quad (7)$$

Furthermore, deducing from Appendix A, the governing equations in the three regions are obtained as

$$\begin{cases} \nabla^2 A_I = 0 \\ \nabla^2 A_{II} = -\mu_0 \nabla \times \mathbf{M} \\ \nabla^2 A_{III} = 0 \end{cases} \quad (8)$$

The magnetic vector potential in cylindrical coordinates can be expressed as

$$\mathbf{A}_i = A_{i,ra} \mathbf{e}_{ra} + A_{i,ci} \mathbf{e}_{ci} + A_{i,ax} \mathbf{e}_{ax} \quad (9)$$

where  $A_{i,ra}$  is the radial component of  $A_i$ ,  $A_{i,ci}$  the circumferential component of  $A_i$  and  $A_{i,ax}$  the axial component of  $A_i$ . For the magnetic field distribution of a tubular linear oscillating motor is axially symmetric,  $A_i$  has only one component  $A_{i,ci}$ . Therefore, the governing equations can be transformed into

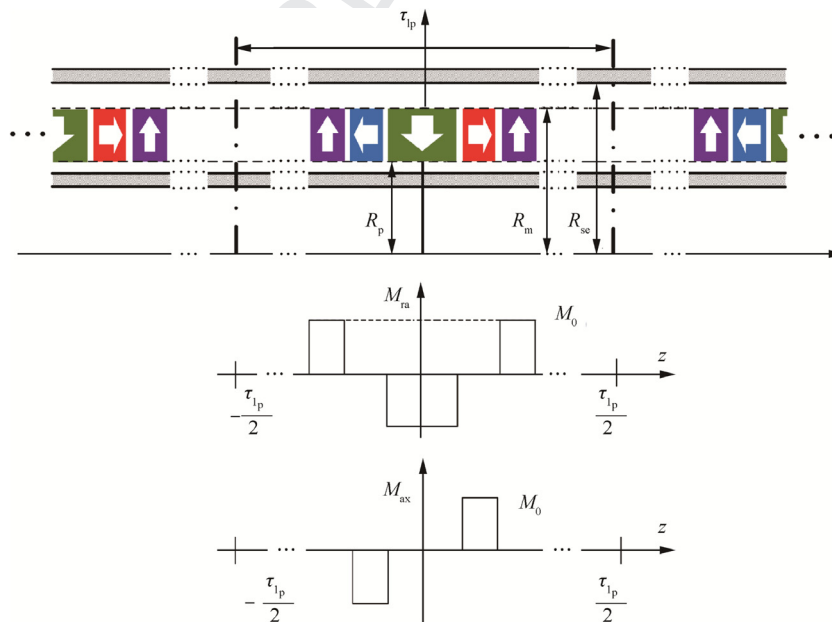


Fig. 5 Distribution of magnetization vector.

$$\begin{cases} A_{I,ci} = \sum_{k=1}^{\infty} \{ [a_{I,k}I_1(m_k r) + b_{I,k}K_1(m_k r)] \sin(m_k z) \} & \text{(region I)} \\ A_{II,ci} = \sum_{k=1}^{\infty} [a_{II,k}I_1(m_k r) + b_{II,k}K_1(m_k r) + P_k L_1(m_k r)] \sin(m_k z) & \text{(region II)} \\ A_{III,ci} = \sum_{k=1}^{\infty} \{ [a_{III,k}I_1(m_k r) + b_{III,k}K_1(m_k r)] \sin(m_k z) \} & \text{(region III)} \end{cases} \quad (10)$$

where  $P_k = \frac{\mu_0 \pi a_k}{2m_k}$ ,  $a_{I,k}$ ,  $b_{I,k}$ ,  $a_{II,k}$ ,  $b_{II,k}$ ,  $a_{III,k}$ ,  $b_{III,k}$  are constants and  $r$  is the radial position.  $I_n(x)$  and  $K_n(x)$  are the modified Bessel functions of the first and second kinds of order  $n$ , respectively, which are defined as

$$\begin{cases} I_n(x) = \sum_{m=0}^{\infty} \frac{1}{m! \Gamma(m+n+1)} \left(\frac{x}{2}\right)^{2m+n} \\ K_n(x) = \frac{\pi}{2} \cdot \frac{I_{-n}(x) - I_n(x)}{\sin(n\pi)} \end{cases} \quad x \in \mathbb{C} \quad (11)$$

The detailed formulas and the expression of  $L_n(x)$  are presented in Appendix B. According to Eqs. (1) and (7), the distribution of the magnet field is given as follows.

$B_{i,ra}$ ,  $B_{i,ax}$  are the radial and axial component of  $\mathbf{B}_i$  in region  $i$ ,  $H_{i,ra}$ ,  $H_{i,ax}$  are the radial and axial component of  $\mathbf{H}_i$  in region  $i$ . In regions I and III,

$$\begin{cases} B_{i,ra} = \sum_{k=1}^{\infty} \{ -m_k [a_{i,k}I_1(m_k r) + b_{i,k}K_1(m_k r)] \cos(m_k z) \} \\ B_{i,ax} = \sum_{k=1}^{\infty} \{ m_k [a_{i,k}I_0(m_k r) - b_{i,k}K_0(m_k r)] \sin(m_k z) \} \\ H_{i,ra} = \sum_{k=1}^{\infty} \left\{ -\frac{m_k}{\mu_0} [a_{i,k}I_1(m_k r) + b_{i,k}K_1(m_k r)] \cos(m_k z) \right\} \\ H_{i,ax} = \sum_{k=1}^{\infty} \left\{ \frac{m_k}{\mu_0} [a_{i,k}I_0(m_k r) - b_{i,k}K_0(m_k r)] \sin(m_k z) \right\} \end{cases} \quad (12)$$

where  $i = I, III$ . In region II,

$$\begin{cases} B_{II,ra} = \sum_{k=1}^{\infty} \{ -m_k [a_{II,k}I_1(m_k r) + b_{II,k}K_1(m_k r) + P_k L_1(m_k r)] \cos(m_k z) \} \\ B_{II,ax} = \sum_{k=1}^{\infty} \{ m_k [a_{II,k}I_0(m_k r) - b_{II,k}K_0(m_k r) + P_k L_0(m_k r)] \sin(m_k z) \} \\ H_{II,ra} = \sum_{k=1}^{\infty} \left\{ -\frac{m_k}{\mu_0} [a_{II,k}I_1(m_k r) + b_{II,k}K_1(m_k r) + P_k L_1(m_k r) + \frac{\mu_0 a_k}{m_k}] \cos(m_k z) \right\} \\ H_{II,ax} = \sum_{k=1}^{\infty} \left\{ \frac{m_k}{\mu_0} [a_{II,k}I_0(m_k r) - b_{II,k}K_0(m_k r) + P_k L_0(m_k r) - \frac{\mu_0 b_k}{m_k}] \sin(m_k z) \right\} \end{cases} \quad (13)$$

In the TMMLOM, the magnetic flux density is continuous in the normal direction of the interface between two mediums, while the magnetic field intensity continuous in the tangential direction. Accordingly, boundary conditions are given as

$$\begin{cases} H_{I,ax}|_{r=R_{se}} = 0 \\ B_{I,ra}|_{r=R_m} = B_{II,ra}|_{r=R_m} \\ H_{I,ax}|_{r=R_m} = H_{II,ax}|_{r=R_m} \\ B_{II,ra}|_{r=R_p} = B_{III,ra}|_{r=R_p} \\ H_{II,ax}|_{r=R_p} = H_{III,ax}|_{r=R_p} \\ H_{III,ax}|_{r=R_h} = 0 \end{cases} \quad (14)$$

The compensation of the stator slot in the TMMLOM is accounted for by introducing a Carter coefficient  $K_c$ , and the equations is given as follows:

$$\begin{cases} g' = g + R_s - R_h \\ \gamma = \frac{4}{\pi} \left[ \frac{\tau_p - b_t}{2g'} \tan^{-1} \left( \frac{\tau_p - b_t}{2g'} - \ln \sqrt{1 + \left( \frac{\tau_p - b_t}{2g'} \right)^2} \right) \right] \\ K_c = \frac{\tau_p}{\tau_p - \gamma g'} \end{cases} \quad (15)$$

Therefore, the effective air-gap  $g_e$ , the effective stator inner radius  $R_{se}$ , the effective PMs inner radius  $R_m$  and the effective hollow core outer radius  $R_p$  are deduced as follows:

$$\begin{cases} g_e = g + (K_c - 1)g' \\ R_{se} = R_s + (K_c - 1)g' \\ R_m = R_s \\ R_p = R_h + g_{ra} \end{cases} \quad (16)$$

Utilizing the expressions of  $a_{I,k}$ ,  $b_{I,k}$ ,  $a_{II,k}$ ,  $b_{II,k}$ ,  $a_{III,k}$ ,  $b_{III,k}$  in Appendix C, the distribution of the magnetic flux can be determined uniquely.

### 3.3. Models of electromotive force and thrust

As shown in Fig. 6,  $z_d$  is the travel distance of the mover, and the configuration of coils is composed of 4 pairs of windings. In terms of the positions of windings, the coils region can be

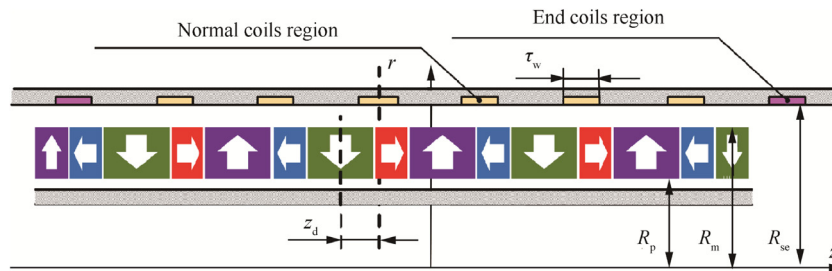


Fig. 6 Topology of an armature.

419 divided into two categories. One is the normal coils winding  
420 whose arrangement is next to two other windings. The other  
421 one is the end coils winding which is located at the end of  
422 the TMMLOM. Moreover, the flux-linkage of a single winding  
423  $\Psi_c$  can be deduced by integration as  
424

$$425 \Psi_c = \frac{N_c}{\tau_w} \int_{z_d - \frac{\tau_w}{2}}^{z_d + \frac{\tau_w}{2}} 2\pi R_{se} A_{1,ci}(R_{se}, z) dz \quad (17)$$

427 where  $N_c$  is the number of coils turns in a single winding  
428 region.

429 Applying the flux distribution of a normal coils region cal-  
430 culated before to Eq. (17) yields  
431

$$432 \Psi_c = 2\pi \sum_{k=1}^{\infty} \left[ \frac{K_{Wk} K_{Sk}}{m_k} \sin(m_k z_d) \right] \quad (18)$$

434 where

$$435 K_{Wk} = \frac{N_c \sin\left(m_k \frac{\tau_w}{2}\right)}{m_k \frac{\tau_w}{2}} \quad (19)$$

$$440 K_{Sk} = m_k R_{se} [a_{1,k} I_1(m_k R_{se}) + b_{1,k} K_1(m_k R_{se})] \quad (20)$$

441  $K_{Wk}$  reflects the influence of the windings configuration, and  
442 the more turns that coils are arranged in the width, the better  
443 output the TMMLOM performs, while  $K_{Sk}$  is a parameter that  
444 contains the information of the structure of an armature and  
445 the topology of PMs. When neglecting the magnetic saturation  
446 effects,  $K_{Sk}$  keeps constant. Hence, the electromotive force of a  
447 single winding can be given by  
448

$$449 e_c = -\frac{d\Psi_c}{dt} = -2\pi v \sum_{k=1}^{\infty} [K_{Wk} K_{Sk} \cos(m_k z_d)] \quad (21)$$

451 where  $v$  is the instantaneous speed of the mover. Thus, the  
452 thrust of a normal coil  $F_c$  is obtained as  
453

$$454 F_c = \frac{e_c i}{v} = -2\pi i \sum_{k=1}^{\infty} [K_{Wk} K_{Sk} \cos(m_k z_d)] \quad (22)$$

456 in which  $i$  is the instantaneous current in a single winding. In  
457 terms of the end coils, the thrust  $F_{ec}$  is expressed by  
458

$$460 F_{ec} = -2\pi i \sum_{k=1}^{\infty} \{K_{Wk} K_{Sk} \cos[m_k(z_d + \tau_p)]\} \quad (23)$$

461 As the TMMLOM has 6 normal coils windings and 2 end  
462 coils windings, the total thrust  $F$  is derived finally as follows:  
463

$$464 F = -2\pi i \sum_{k=1}^{\infty} \{K_{Wk} K_{Sk} [6 \cos(m_k z_d) + 2 \cos(m_k z_d) \times \cos(m_k \tau_p)]\} \quad (24)$$

465 After the design finalization of the TMMLOM, Eq. (24)  
466 indicates that the thrust is a function of the current and the  
467 mover position.  
468

#### 4. Simulation and validation 469

470 In this section, analytical calculations and FEM experiments  
471 are implemented based on the major parameters of the  
472 TMMLOM given in Table 1, and the model is validated by  
473 measured results.

##### 4.1. Validation of the analytical model 474

475 Finite element model (FEM) analysis achieves a good accuracy  
476 in the magnetic flux distribution of a tubular linear motor.<sup>41</sup>  
477 To verify the analytical model proposed in the last section,  
478 an FEM is established in the ANSYS Maxwell software. The  
479 open-circuit magnetic field whose coils are not energized is  
480 simulated, and the flux density distributed in the air-gap is gen-  
481 erated by a quasi-Halbach PM arrays form mover. The radial  
482 flux density at the radius of  $r = 18.3$  mm is illustrated in Fig. 7  
483 (a) and the axial flux density in Fig. 7(b). The calculated results  
484 from the analytical model are also depicted in both figures as  
485 well. As shown in Fig. 7(a), the analytical results matches well  
486 with the red curves, which is precise enough to describe the flux  
487 regularity and calculate the output thrust.

488 Besides, the axial flux density obtained from the analytical  
489 results also shares a similar trend to the FEM data, and the  
490 practicability of the proposed model has been demonstrated.

491 The output force of the TMMLOM is related to the distri-  
492 bution of the radial density. According to the axial informa-  
493 tion of flux calculated above, the thrust can be derived  
494 analytically. The analytical relations and finite element results  
495 are exhibited in Fig. 8.

Table 1 Leading parameters of the TMMLOM.

Symbol	$b_t$ (mm)	$\tau_w$ (mm)	$g$ (mm)	$\tau_{ra}$ (mm)	$\tau_{ax}$ (mm)	$\tau_p$ (mm)	$R_{sh}$ (mm)	$R_h$ (mm)	$R_s$ (mm)	$B_{re}$ (T)
Value	12	3	1	16	8	24	10	14	18	1.24

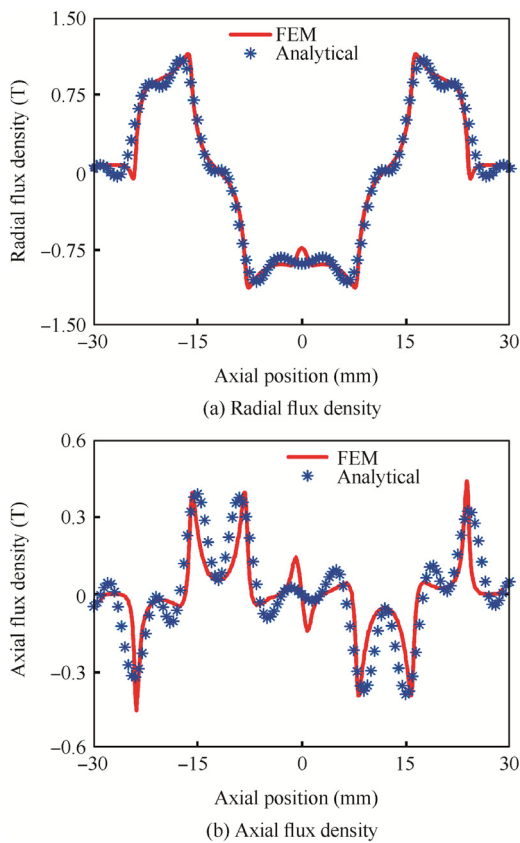


Fig. 7 Validation of flux density.

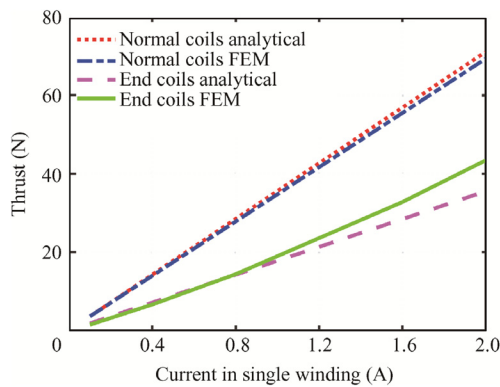


Fig. 8 Validation of thrust.

496 It can be validated that the normal coils and end coils have  
 497 different regulations of output force. The normal coils, which  
 498 produce the thrust primarily, fit very well with the FEM result.  
 499 It is demonstrated that the thrust of the normal coils is a linear  
 500 function to the current, and the small error in condition of  
 501 high current is caused by the magnetic saturation. The end  
 502 coils model, however, presents a larger error. Because the  
 503 end effect of the liner motor, the magnetic flux is unsymmetri-  
 504 cal with respect to the end coils. Due to the fact that the  
 505 TMMLOM has 6 normal coils windings and only 2 end coils  
 506 windings, what's more, the force generated by the end coils  
 507 is only half of that by the normal coils. Hence, the error is  
 508 acceptable, and the thrust model is suitable in gap analysis.

#### 4.2. Effect of the radial and axial gaps

##### 4.2.1. Effect of the radial and axial gaps on the flux distribution

511 After validation of the proposed model considering the mover  
 512 gaps, the effect of gaps is discussed. For the radial magnetic  
 513 flux is a key factor that affects the output, the distribution of  
 514 the magnetic flux in the radial direction is analyzed considering  
 515 radial gaps in Fig. 9(a) and axial gaps in Fig. 9(b), respectively.

516 Fig. 9(a) shows the distribution of the radial flux in the air-  
 517 gap with different sizes of radial gaps. It demonstrates that  
 518 radial gaps would decrease the amplitude comprehensively.  
 519 Even though they do not change the waveform of the flux distri-  
 520 bution, the value of the whole magnetic field declines heavily  
 521 with increasing radial gaps. When it comes to axial gaps, the  
 522 effect is different. As depicted in Fig. 9(b), only the peak value  
 523 of the flux field falls with these gaps. In the contrary, the cen-  
 524 tral area of the flux distribution is not affected by  $g_{ax}$ . Eventu-  
 525 ally, the average value of the magnetic flux under the influence  
 526 of axial gaps is much higher than that of radial gaps with the  
 527 same gap thickness. Similar simulation results could also be  
 528 drawn by the FEM results as shown in Fig. 10, which have ver-  
 529 ified the conclusion of the proposed model.

530 Comparing radial gaps with axial gaps, the former have a  
 531 more significant impact on the radial flux density, and the neg-

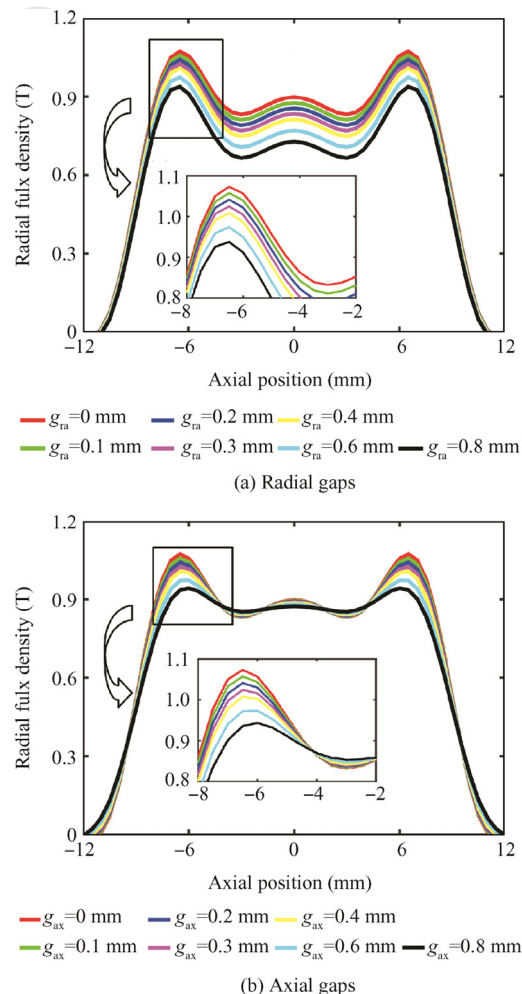


Fig. 9 Effect of gaps on radial flux density analytically.



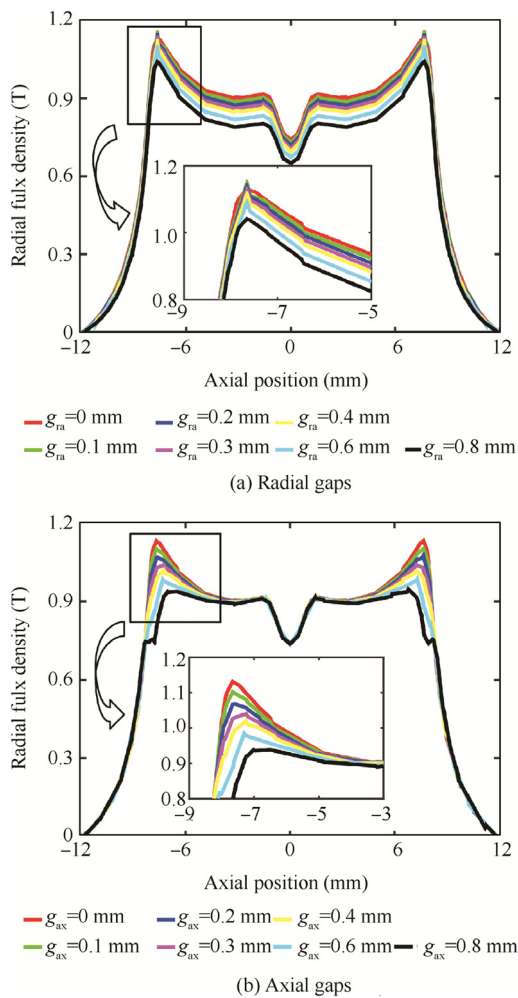


Fig. 10 Effect of gaps on radial flux density by FEM.

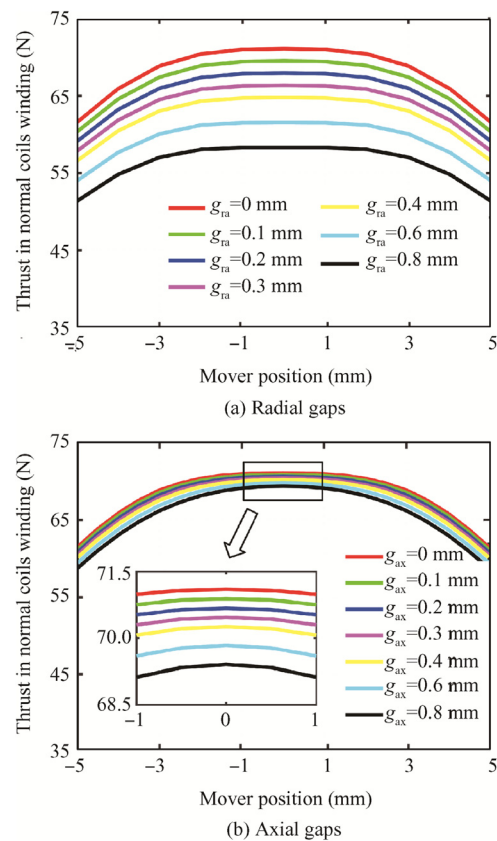


Fig. 11 Effect of gaps on thrust in normal coils winding.

ative effect could decrease the energy density of the magnet flied in the air-gap, as well as the power density in the TMMLOM.

4.2.2. Effect of the radial and axial gaps on the thrust

Using the validated model, the relationship between the thrust and mover gaps is further investigated. Fig. 11 reflect the influence of gaps in a normal coils winding.

Assign the current as a constant of 2 A, and the result shows that the thrust varies with the mover position. When the stoke distance is less than 2 mm, the thrust is approximate to a stable value. Nevertheless, if the mover moves further, the thrust would decrease gradually. Because the width of radial magnetized PMs is 16 mm, the width of coils in a winding is 12 mm. The mover moves only in a range of plus and minus 2 mm, so the thrust would not decline, and the stable stroke could be defined as

$$S_s = \frac{\tau_{ra}}{2\tau_w} \quad (25)$$

The radial and axial gaps are another aspect of causes, which lead to a thrust loss. As illustrated in Fig. 11, both types of gaps lead to an overall drop of the thrust curve, and it declines faster in the effect of radial gaps compared with that of

axial gaps. This result agrees well with the distribution of the flux density, for the output force is directly proportional to magnet remanence of permanent magnets  $B_{re}$ .


Fig. 12 are the thrust outputs affected by gaps in an end coils winding. The thrust curves of end coils are no more asymmetrical like those in normal coils. The reason is the unsymmetrical distribution of the flux density generated by end PMs. Both of the two end coils have an opposite force trend, which results in the approximate symmetry in dual end coils.

The effect of mover gaps in end coils is unsymmetrical, either. The attenuation is obvious in a positive stoke and unobvious in a negative stoke. As the end coils are not in a strong magnetic area, the thrust as well as the decrement of the thrust drops heavily in the minus mover position. The other effect is the same as that in normal coils.


The total thrust of the TMMLOM is shown in Fig. 13. For the reason that the total force depends mostly on the normal coils, the thrust property is similar to that with the normal coils. Hence, the total thrust of the motor is much more sensitive to the radial gaps than the axial gaps.

5. Comparison with experimental results

He et al. measured the radial flux density of a TMMLOM prototype.<sup>37</sup> She also built an FEM and lumped magnetic circuit model to describe the radial flux density in the air-gap. The error of her analytical model is much greater than that of the FEM results. Her experiment results and FEM calculations are presented in Fig. 14. The radial flux density marked black

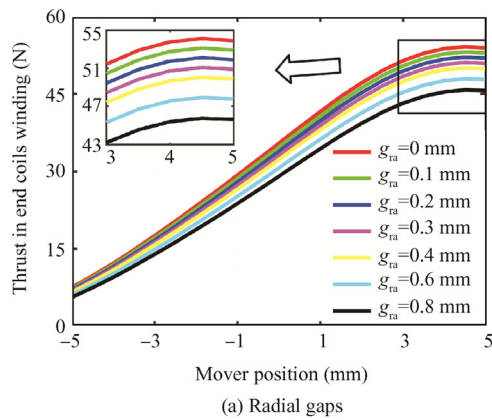


(a) Radial gaps

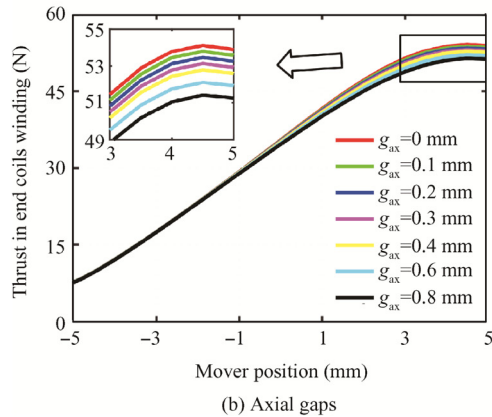


(b) Axial gaps

Fig. 12 Effect of gaps on thrust in end coils winding.

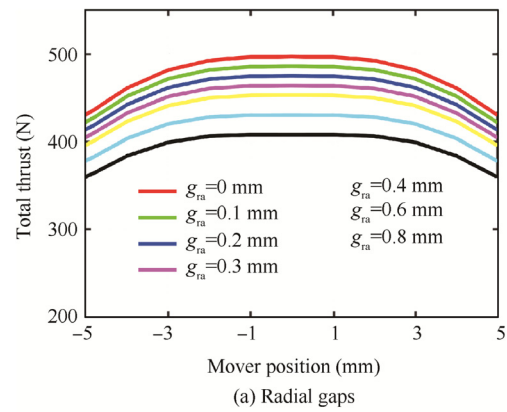

(a) Radial gaps

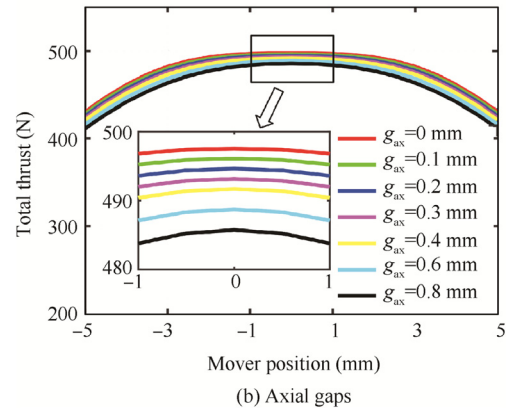

(b) Axial gaps

Fig. 13 Effect of gaps on total thrust.

582 was measured by a Gauss meter with the mover assembled  
 583 inside the stator. From the figure, the magnetic field intensity  
 584 of the amaranthine curve is obviously higher than the experi-  
 585 mental points. Using the model proposed in this paper to  
 586 express the magnet field, the analytical results without gaps  
 587 are close to the FEM curve, which didn't take the mover gaps  
 588 into account. When taking the gaps into consideration, the  
 589 mean value is close to the measured data, as shown in the  
 590 red curve whose axial gap is 0.2 mm and radial gap is 0.5  
 591 mm. There still exist some errors because of the stator slot.  
 592 The comparison confirms the rationality and accuracy of the  
 593 proposed model.

594 **6. Conclusions**

595 This paper studies the effects of mover gaps in a TMMLOM  
 596 on the distribution of the magnetic flux density and the output  
 597 thrust. An analytical model is proposed considering radial and  
 598 axial gaps, and its performance is validated through FEM  
 599 experiments.

600 Based on this approach, both radial and axial gaps would  
 601 weaken the performance of the TMMLOM. Radial gaps  
 602 would lead to a comprehensive damping in the radial flux den-  
 603 sity in the air-gap, while the axial mover only decreases that at  
 604 the end of the radial polarized magnet. Besides, 85% of the  
 605 thrust in the motor is produced by normal coils, so the effect  
 606 of gaps on the total force is similar to that of normal coils.  
 607 In addition, the existence of radial gaps may cause a thrust  
 608 decay 5 times as much as that influenced by axial gaps. Thus,

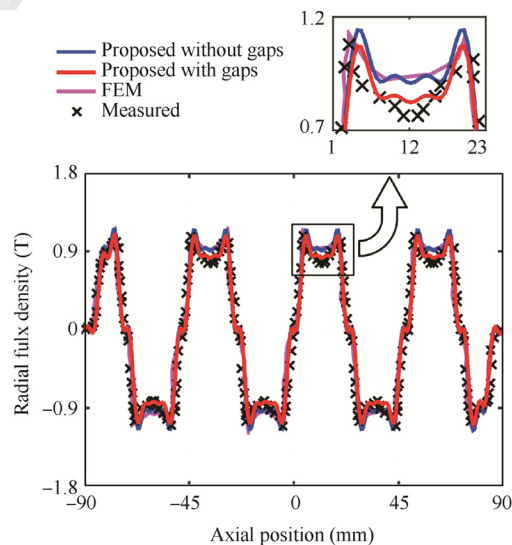


Fig. 14 Comparison with experimental results.

609 in the process of designing and manufacturing TMMLOMs, it  
 610 is noticeable to pay more attention to limit the thickness of  
 611 radial gaps than to axial ones.

612 **Acknowledgements**

613 The authors would like to appreciate the supports of National  
 614 Basic Research Program of China (973 Program) (No.

615 2014CB046402), National Natural Science Foundation of  
616 China (Nos. 51620105010, 51575019, 51675019, 51505015),  
617 and 111 Program of China.

618 **Appendix A**

619 Because the curl of any scalar function's (f) gradient is always  
620 equal to zero, we could have

$$621 \nabla \times \mathbf{A}_i = \nabla \times (\mathbf{A}_i + \nabla f) \quad (A1)$$

624 which indicates that  $\mathbf{A}_i$  may have multiple solutions. To  
625 uniquely determine its value, Coulomb gauge,  $\nabla \cdot \mathbf{A}_i = 0$ , is  
626 applied as a constraint. Hence, we could have

$$629 \nabla \times \mathbf{B}_i = \nabla \times (\nabla \times \mathbf{A}_i) = \nabla(\nabla \cdot \mathbf{A}_i) - \nabla^2 \mathbf{A}_i = -\nabla^2 \mathbf{A}_i \quad (A2)$$

630 The combination of Maxwell's equations and Eq. (1) gives

$$633 \nabla \times \mathbf{B}_i = \nabla \times \mu_0 \mathbf{H}_i = \mu_0 \mathbf{J} \quad (A3)$$

634 Substituting Eq. (A2) into Eq. (A3) yields

$$637 \nabla^2 \mathbf{A}_i = -\mu_0 \mathbf{J} \quad (A4)$$

638 where  $\mathbf{J}$  (A/m<sup>2</sup>) is the current density in the field. In the air-gap  
639 of a linear oscillating motor,  $\mathbf{J} = \mathbf{0}$ . Therefore, the Laplace's  
640 equation for Region I is obtained as

$$643 \nabla^2 \mathbf{A}_i = 0 \quad (A5)$$

644 Similarly, the Laplace equation for Region III is derived as

$$647 \nabla^2 \mathbf{A}_{III} = 0 \quad (A6)$$

648 In Region II, the combination of Maxwell's equations and  
649 Eq. (1) gives

$$652 \nabla \times \mathbf{B}_{II} = \mu_0 \mu_{rII} \mathbf{J} + \mu_0 \nabla \times \mathbf{M} \quad (A7)$$

653 For  $\mathbf{J} = \mathbf{0}$ , Eqs. (A2) and (A7) obtain the Poisson equation  
654 analogously for Region II as

$$657 \nabla^2 \mathbf{A}_{II} = -\mu_0 \nabla \times \mathbf{M} \quad (A8)$$

658 **Appendix B**

659 Considering that expression  $A'_{i,ci}$  is any order of Fourier series  
660 of  $A_{i,ci}$ , since  $A_{i,ci}$  is only a function of  $r$  and  $\theta$ , we could assume  
661 that

$$664 A'_{i,ci} = R_i(r)Z_i(z) \quad (B1)$$

665 where  $r$  is the unique variable of  $R_i(r)$  and  $z$  the unique vari-  
666 able of  $Z_i(z)$  according to the method of variable separation.

667 *General solution to Laplace equation*

668 The Laplace Eqs. (A5) and (A6) in cylindrical coordinates can  
669 be simplified as

$$672 \nabla^2 \mathbf{A} = \nabla^2(A_{ra} \mathbf{e}_{ra}) + \nabla^2(A_{ci} \mathbf{e}_{ci}) + \nabla^2(A_{ax} \mathbf{e}_{ax}) \\ 673 = \nabla^2(A_{ci} \mathbf{e}_{ci}) = \mathbf{0} \quad (B2)$$

$$674 \nabla^2(A_{ci} \mathbf{e}_{ci}) = -\frac{2}{r^2} \cdot \frac{\partial A_{ci}}{\partial \theta} \mathbf{e}_{ra} \\ 675 + \left( \frac{\partial^2 A_{ci}}{\partial r^2} + \frac{1}{r} \cdot \frac{\partial A_{ci}}{\partial r} + \frac{\partial^2 A_{ci}}{\partial z^2} + \frac{2}{r^2} \cdot \frac{\partial A_{ci}}{\partial \theta} - \frac{A_{ci}}{r^2} \right) \mathbf{e}_{ci} = \mathbf{0} \quad (B3)$$

For the magnetic field distribution of a tubular linear oscillating motor is axially symmetric, the expression becomes

$$676 \left( \frac{\partial^2 A_{ci}}{\partial r^2} + \frac{1}{r} \cdot \frac{\partial A_{ci}}{\partial r} - \frac{A_{ci}}{r^2} + \frac{\partial^2 A_{ci}}{\partial z^2} \right) \mathbf{e}_{ci} = \mathbf{0} \quad (B4) \quad 677 \quad 678$$

namely,

$$681 \frac{\partial^2 A'_{ci}}{\partial r^2} + \frac{1}{r} \cdot \frac{\partial A'_{ci}}{\partial r} - \frac{A'_{ci}}{r^2} + \frac{\partial^2 A'_{ci}}{\partial z^2} = 0 \quad (B5) \quad 682 \quad 684$$

where  $i = I, III$  and  $A'_{ci}$  is any order of Fourier series of  $A_{ci}$ .  
Substituting Eq. (B1) into Eq. (B4) yields

$$685 \frac{1}{R_i(r)} \cdot \frac{\partial^2 R_i(r)}{\partial r^2} + \frac{1}{R_i(r)r} \cdot \frac{\partial R_i(r)}{\partial r} - \frac{1}{r^2} + \frac{1}{Z_i(z)} \cdot \frac{\partial^2 Z_i(z)}{\partial z^2} = 0 \quad (B6) \quad 686 \quad 687$$

where  $r$  and  $z$  are independent variables, and the last term as a  
function of  $z$  must be a constant. Therefore, the following formula  
is established:

$$689 \frac{1}{Z_i(z)} \cdot \frac{\partial^2 Z_i(z)}{\partial z^2} = \lambda^2 \quad (B7) \quad 690 \quad 691 \quad 692 \quad 693$$

Then Eq. (B5) can be written as

$$694 \frac{1}{R_i(r)} \cdot \frac{\partial^2 R_i(r)}{\partial r^2} + \frac{1}{R_i(r)r} \cdot \frac{\partial R_i(r)}{\partial r} + \lambda^2 - \frac{1}{r^2} = 0 \quad (B8) \quad 695 \quad 696 \quad 697$$

Eq. (B6) becomes

$$700 \frac{\partial^2 Z_i(z)}{\partial z^2} - \lambda^2 Z_i(z) = 0 \quad (B9) \quad 701 \quad 703$$

So Eq. (B5) equals to

$$704 \begin{cases} \frac{\partial^2 Z_i(z)}{\partial z^2} - \lambda^2 Z_i(z) = 0 \\ \frac{1}{R_i(r)} \cdot \frac{\partial^2 R_i(r)}{\partial r^2} + \frac{1}{R_i(r)r} \cdot \frac{\partial R_i(r)}{\partial r} + \lambda^2 - \frac{1}{r^2} = 0 \end{cases} \quad (B10) \quad 705 \quad 707$$

and there are three possible solutions according to the varia-  
tion of  $\lambda^2$ .

When  $\lambda^2 = 0$ , the following equations are obtained:

$$710 \begin{cases} \frac{\partial^2 Z_i(z)}{\partial z^2} = 0 \\ r^2 \frac{\partial^2 R_i(r)}{\partial r^2} + r \frac{\partial R_i(r)}{\partial r} - R_i(r) = 0 \end{cases} \quad (B11) \quad 711 \quad 713$$

The general solution to Eq. (B11) is

$$714 \begin{cases} Z_i(z) = C_0 + C_1 z \\ R_i(r) = C_2 r + \frac{C_3}{r} \end{cases} \quad (B12) \quad 715 \quad 717$$

where  $C_0, C_1, C_2, C_3$  are constants. Thus

$$718 A'_{i,ci} = R_i(r)Z_i(z) = (C_0 + C_1 z)(C_2 r + \frac{C_3}{r}) \quad (B13) \quad 719 \quad 721$$

For  $A'_{i,ci}$  should be a periodic function of  $z$ , Eq. (B13) is not  
a valid solution of  $A'_{i,ci}$ .

When  $\lambda^2 > 0$ , the following equations are obtained:

$$722 \begin{cases} \frac{\partial^2 Z_i(z)}{\partial z^2} - \lambda^2 Z_i(z) = 0 \\ \frac{\partial^2 R_i(r)}{\partial (\lambda r)^2} + \frac{1}{\lambda r} \cdot \frac{\partial R_i(r)}{\partial (\lambda r)} + (1 - \frac{1}{(\lambda r)^2}) R_i(r) = 0 \end{cases} \quad (B14) \quad 723 \quad 724 \quad 725$$

The general solution to Eq. (B11) is

$$726 \begin{cases} Z_i(z) = C_0 e^{\lambda z} + C_1 e^{-\lambda z} \\ R_i(r) = C_2 J_1(\lambda r) + C_3 Y_1(\lambda r) \end{cases} \quad (B15) \quad 727 \quad 728 \quad 729 \quad 731$$

where  $C_0, C_1, C_2, C_3$  are constants,  $J_n(x)$  is the Bessel function of the first kind of order  $n$ ,  $Y_n(x)$  the Bessel function of the second kind of order  $n$ , and  $\Gamma(x)$  the Gamma function, which are defined as

$$\begin{cases} J_n(x) = \sum_{m=0}^{\infty} \frac{(-1)^m}{m! \Gamma(m+n+1)} \left(\frac{x}{2}\right)^{2m+n} \\ Y_n(x) = \frac{J_n(x) \cos(n\pi) - J_{-n}(x)}{\sin(n\pi)} \\ \Gamma(x) = \int_0^{\infty} e^{-t} t^{x-1} dt \end{cases} \quad x \in \mathbf{R} \quad (\text{B16})$$

Thus

$$\begin{aligned} A'_{i,ci} &= R_i(r)Z_i(z) \\ &= (C_0 e^{\lambda z} + C_1 e^{-\lambda z}) [C_2 J_1(\lambda r) + C_3 Y_1(\lambda r)] \end{aligned} \quad (\text{B17})$$

For  $A'_{i,ci}$  should be a periodic function of  $z$ , Eq. (B17) is not a valid solution of  $A'_{i,ci}$ .

When  $\lambda^2 < 0$ , let  $\lambda = jm_k$ , where  $j$  is the imaginary unit. The following equations are obtained:

$$\begin{cases} \frac{\partial^2 Z_i(z)}{\partial z^2} + m_k^2 Z_i(z) = 0 \\ \frac{\partial^2 R_i(r)}{\partial (m_k r)^2} + \frac{1}{\lambda r} \cdot \frac{\partial R_i(r)}{\partial (m_k r)} - \left(1 + \frac{1}{(m_k r)^2}\right) R_i(r) = 0 \end{cases} \quad (\text{B18})$$

The general solution to Eq. (B18) is

$$\begin{cases} Z_i(z) = C_0 \cos(m_k z) + C_1 \sin(m_k z) \\ R_i(r) = C_2 I_1(m_k r) + C_3 K_1(m_k r) \end{cases} \quad (\text{B19})$$

Thus

$$\begin{aligned} A'_{i,ci} &= R_i(r)Z_i(z) = [C_4 I_1(m_k r) + C_5 K_1(m_k r)] \cos(m_k z) \\ &\quad + [C_6 I_1(m_k r) + C_7 K_1(m_k r)] \sin(m_k z) \end{aligned} \quad (\text{B20})$$

where  $C_4, C_5, C_6, C_7$  are constants. In this case,  $A'_{i,ci}$  is a periodic function of  $z$ . Hence, Eq. (B19) is probably a solution of Laplace's equation.

Eq. (7) in cylindrical coordinates is expressed as

$$\mathbf{B}_i = \left(-\frac{\partial A_{i,ci}}{\partial z}\right) \mathbf{e}_{ra} + \frac{1}{r} \left(\frac{\partial (r A_{i,ci})}{\partial r}\right) \mathbf{e}_{ax} \quad (\text{B21})$$

Considering the constraint of symmetry at  $z = 0$ , we have the radial component of the flux density  $B_{ra}|_{z=0} = 0$ . Moreover, Substituting Eq. (B19) into Eq. (B20) gives

$$\begin{aligned} \mathbf{B}_I &= \sum_{k=1}^{\infty} \{m_k \{ [C_4 I_1(m_k r) + C_5 K_1(m_k r)] \sin(m_k z) \\ &\quad - [C_6 I_1(m_k r) + C_7 K_1(m_k r)] \cos(m_k z) \} \mathbf{e}_{ra} \\ &\quad + \frac{1}{r} \left(\frac{\partial (r A_{I,ci})}{\partial r}\right) \mathbf{e}_{ax} \} \end{aligned} \quad (\text{B22})$$

Thus we draw the conclusion that

$$\begin{cases} C_6 = 0 \\ C_7 = 0 \end{cases} \quad (\text{B23})$$

Therefore, the general solution to the Laplace's Eq. (B6) is

$$A_{i,ci} = \sum_{k=1}^{\infty} \{ [a_{i,k} I_1(m_k r) + b_{i,k} K_1(m_k r)] \cos(m_k z) \} \quad (\text{B24})$$

where  $i = I, III$  and  $a_{i,k}, b_{i,k}$  are constants.

General solution to Poisson equation

The Poisson Eq. (A8) in cylindrical coordinates can be simplified as

$$\left(\frac{\partial^2 A_{II,ci}}{\partial r^2} + \frac{1}{r} \cdot \frac{\partial A_{II,ci}}{\partial r} - \frac{A_{II,ci}}{r^2} + \frac{\partial^2 A_{II,ci}}{\partial z^2}\right) \mathbf{e}_{ci} = -\mu_0 \frac{\partial M_{ra}}{\partial z} \mathbf{e}_{ci} \quad (\text{B25})$$

Substituting Eq. (4) into Eq. (B24) yields

$$\begin{aligned} \frac{\partial^2 A_{II,ci}}{\partial r^2} + \frac{1}{r} \cdot \frac{\partial A_{II,ci}}{\partial r} - \frac{A_{II,ci}}{r^2} + \frac{\partial^2 A_{II,ci}}{\partial z^2} \\ = -\mu_0 \sum_{k=1}^{\infty} m_k b_k \cos(m_k z) \end{aligned} \quad (\text{B26})$$

Similarly, the general solution to the corresponding homogeneous equation of the Poisson Eq. (B25) is

$$\sum_{k=1}^{\infty} S(r, z) = \sum_{k=1}^{\infty} R_{II}(r) Z_{II}(z) \quad (\text{B27})$$

Assuming that  $\sum_{k=1}^{\infty} S(r, z) = \sum_{k=1}^{\infty} R_{II}(r) Z_{II}(z)$  is a particular solution of the Poisson equation, the general solution to the Poisson equation is obtained as

$$\begin{aligned} A_{II,ci} &= \sum_{k=1}^{\infty} \{ [a_{II,k} I_1(m_k r) + b_{II,k} K_1(m_k r)] \cos(m_k z) \\ &\quad + S_k(r, z) \} \end{aligned} \quad (\text{B28})$$

Substituting  $\sum_{k=1}^{\infty} S(r, z) = \sum_{k=1}^{\infty} R_{II}(r) Z_{II}(z)$  into Eq. (B25) gives

$$\begin{aligned} \frac{1}{R_{II,k}(r)} \cdot \frac{\partial^2 R_{II,k}(r)}{\partial r^2} + \frac{1}{R_{II,k}(r)r} \cdot \frac{\partial R_{II,k}(r)}{\partial r} - \frac{1}{r^2} + \frac{1}{Z_{II,k}(z)} \\ \cdot \frac{\partial^2 Z_{II,k}(z)}{\partial z^2} \\ = \frac{-\mu_0 m_k b_k \cos(m_k z)}{R_{II,k}(r) Z_{II,k}(z)} \end{aligned} \quad (\text{B29})$$

Let  $\frac{1}{Z_{II,k}(z)} \cdot \frac{\partial^2 Z_{II,k}(z)}{\partial z^2} = -m_k^2$ , i.e.,

$$Z_{II}(z) = \cos(m_k z) \quad (\text{B30})$$

Substituting Eq. (B29) into Eq. (B28) yields

$$\begin{aligned} (m_k r)^2 \frac{\partial^2 \left(\frac{R_{II,k}(r)}{P_k}\right)}{\partial (m_k r)^2} + m_k r \frac{\partial \left(\frac{R_{II,k}(r)}{P_k}\right)}{\partial (m_k r)} \\ - ((m_k r)^2 + 1) \left(\frac{R_{II,k}(r)}{P_k}\right) = \frac{2(m_k r)^2}{\pi} \end{aligned} \quad (\text{B31})$$

where  $P_k = -\frac{\mu_0 \pi b_k}{2m_k}$ . The general solution to the modified Struve differential Eq. (B30) is

$$R_{II}(r) = P_k L_1(m_k r) \quad (\text{B32})$$

where  $H_n(x)$  are the Struve functions of order  $n$  and  $L_n(x)$  the modified Struve functions of order  $n$ .

$$\begin{cases} H_n(x) = \left(\frac{x}{2}\right)^{n+1} \sum_{m=0}^{\infty} \frac{(-1)^m \left(\frac{x}{2}\right)^{2m}}{\Gamma(m+\frac{3}{2}) \Gamma(m+n+\frac{3}{2})} \\ L_n(x) = -j e^{-n\pi/2} H_n(jx) \end{cases} \quad (\text{B33})$$

Hence, the particular solution of the Poisson equation is

827  $S_k(r, z) = R_{II,k}(r)Z_{II,k}(z) = P_k L_1(m_k r) \cos(m_k z)$  (B34)

828 Substituting Eq. (B32) into Eq. (B27) derives the general  
829 solution to the Poisson equation as  
830

832 
$$A_{II,ci} = \sum_{k=1}^{\infty} [a_{II,k} I_1(m_k r) + b_{II,k} K_1(m_k r) + P_k L_1(m_k r)] \cos(m_k z)$$
 (B35)

833 **Appendix C**

834 Submitting Eqs. (12) and (13) into Eq. (14), we can yield the  
835 following equation:

$$\begin{bmatrix} I_0(m_k R_{se}) & -K_0(m_k R_{se}) & 0 & 0 & 0 & 0 & 0 \\ I_1(m_k R_m) & K_1(m_k R_m) & -I_1(m_k R_m) & -K_1(m_k R_m) & 0 & 0 & 0 \\ I_0(m_k R_m) & -K_0(m_k R_m) & -I_0(m_k R_m) & K_0(m_k R_m) & 0 & 0 & 0 \\ 0 & 0 & I_1(m_k R_p) & K_1(m_k R_p) & -I_1(m_k R_p) & -K_1(m_k R_p) & 0 \\ 0 & 0 & I_0(m_k R_p) & -K_0(m_k R_p) & -I_0(m_k R_p) & K_0(m_k R_p) & 0 \\ 0 & 0 & 0 & 0 & I_0(m_k R_h) & -K_0(m_k R_h) & 0 \end{bmatrix} \begin{bmatrix} a_{I,k} \\ b_{I,k} \\ a_{II,k} \\ b_{II,k} \\ a_{III,k} \\ b_{III,k} \end{bmatrix} = \begin{bmatrix} 0 \\ P_k L_1(m_k R_m) \\ P_k L_0(m_k R_m) - \frac{\mu_0 b_k}{m_k} \\ -P_k L_1(m_k R_p) \\ -P_k L_0(m_k R_p) + \frac{\mu_0 b_k}{m_k} \\ 0 \end{bmatrix} \quad (C1)$$

836 The solutions of Eq. (C1) fix the undetermined coefficients  
837 in Eqs. (12) and (13).

838 **References**

839 1. Ebihara D, Watada M. Development of a single-winding linear  
840 oscillatory actuator. *IEEE Trans Magn* 1992;**28**(5):3030–2.  
841 2. Watada M, Yanashima K, Oishi Y, Ebihara D, Dohmeki H.  
842 Improvement on characteristics of linear oscillatory actuator for  
843 artificial hearts. *IEEE Trans Magn* 1993;**29**(6):3361–3.  
844 3. Redlich R. A summary of twenty years experience with linear  
845 motors and alternators *Proceedings of linear divers for industry*  
846 *applications, 1995 May 31–June 2, Nagasaki, Japan*. p. 1–7.  
847 4. Boldea I, Nasar SA. Linear electric actuators and generators *Elec-*  
848 *tric machines and drives conference*. Cambridge, UK. Piscataway,  
849 NJ: IEEE Press; 1997. p. 5.  
850 5. Lee HK, Song GY, Park JS, Hong EP, Jung WH. Development of  
851 the linear compressor for a household refrigerator *Proceedings of*  
852 *fifteenth international compressor engineering conference, 2000 July*  
853 *25–28, West Lafayette, USA*. p. 31–8.  
854 6. Lee H, Jeong SS, Lee CW, Lee HK. Linear compressor for air-  
855 conditioner *Proceedings of the international compressor engineering*  
856 *conference, 2004 July 12–15, West Lafayette, USA*. p. C047.  
857 7. Liang HS, Jiao ZX, Yan L, Zhao LF, Wu S, Li Y. Design and  
858 analysis of a tubular linear oscillating motor for directly-driven  
859 eha pump. *Sens Actuators A – Phys* 2014;**210**:107–18.  
860 8. Wang TY, Liang HS, Jiao ZX, He P, Yan L. Dynamics modeling  
861 and load analysis of linear motor for leha system *Proceedings of*  
862 *fluid power and mechatronics (FPM), 2015 Aug 5–7, Harbin,*  
863 *China*. p. 1128–33.  
864 9. Wang ZM, Jiao ZX, Li Y. design and simulation of a collaborative  
865 rectification hydraulic pump *Proceedings of guidance, navigation*  
866 *and control conference (CGNCC), 2014 Aug 8–10, Beijing, China*.  
867 p. 2065–70.  
868 10. Kim TH, Lee HW, Kim YH, Lee J. Development of a flux  
869 concentration-type linear oscillatory actuator. *IEEE Trans Magn*  
870 2004;**40**(4):2092–4.

11. Tutelea LN, Kim MC, Topor M, Ju L, Boldea I. Linear  
871 permanent magnet oscillatory machine: Comprehensive modeling  
872 for transients with validation by experiments. *IEEE Trans Industr*  
873 *Electron* 2008;**55**(2):492–500. 874  
12. Kim YK, Gu BG, Rhyu SH, Jung IS. Analysis and design of  
875 slotless tubular linear actuator for high performance on the eco-  
876 pedal system of vehicles. *Int J Appl Electromagnet Mech* 2012;**39**  
877 (1):817–23. 878  
13. Kim YK, Gu BG, Jung IS, Won SH, Hur J. Analysis and design of  
879 slotted tubular linear actuator for the eco-pedal system of a  
880 vehicle. *IEEE Trans Magn* 2012;**48**(2):939–42. 881  
14. Wang JB, Jewell GW, Howe D. General framework for the  
882 analysis and design of tubular linear permanent magnet machines.  
883 *IEEE Trans Magn* 1999;**35**(3):1986–2000. 884

15. Bianchi N, Bolognani S, Cortese DD, Tonel F. Tubular linear  
885 permanent magnet motors: An overall comparison. *IEEE Trans*  
886 *Ind Appl* 2003;**39**(2):466–75. 887  
16. Wang JB, Howe D, Li ZY. Comparative study of winding  
888 configurations of short-stroke, single phase tubular permanent  
889 magnet motor for refrigeration applications *Proceedings of the*  
890 *42nd IEEE IAS annual meeting; 2007 Sept 23–27; New Orleans,*  
891 *USA*. p. 11–28. 892  
17. Wang JB, Howe D, Li ZY. Comparative studies on linear motor  
893 topologies for reciprocating vapor compressors *2007 IEEE inter-*  
894 *national electric machines & drives conference, 2007 May 3–5,*  
895 *Antalya, Turkey*. p. 364–9. 896  
18. Wang JB, Lin ZY, Howe D. Analysis of a short-stroke, single-  
897 phase, quasi-halbach magnetised tubular permanent magnet  
898 motor for linear compressor applications. *IET Electr Power Appl*  
899 2008;**2**(3):193–200. 900  
19. Wang JB, Howe D, Lin ZY. Design optimization of short-stroke  
901 single-phase tubular permanent-magnet motor for refrigeration  
902 applications. *IEEE Trans Industr Electron* 2010;**57**(1):327–34. 903  
20. Zhu ZQ, Chen X, Howe D, Iwasaki S. Electromagnetic modeling  
904 of a novel linear oscillating actuator. *IEEE Trans Magn* 2008;**44**  
905 (11):3855–8. 906  
21. Chen X, Zhu ZQ, Howe D, Dai JS. Comparative study of  
907 alternative permanent magnet linear oscillating actuators *Proceed-*  
908 *ings of 2008 international conference on electrical machines and*  
909 *systems, 2008 Oct 17–20, Sapporo, Japan*. p. 2826–31. 910  
22. Zhu ZQ, Chen X. Analysis of an E-core interior permanent  
911 magnet linear oscillating actuator. *IEEE Trans Magn* 2009;**45**  
912 (10):4384–7. 913  
23. Chen X, Zhu ZQ, Howe D. Modeling and analysis of a tubular  
914 oscillating permanent-magnet actuator. *IEEE Trans Ind Appl*  
915 2009;**45**(6):1961–70. 916  
24. Chen X, Zhu ZQ. Analytical determination of optimal split ratio  
917 of e-core permanent magnet linear oscillating actuators. *IEEE*  
918 *Trans Ind Appl* 2011;**47**(1):25–33. 919  
25. Wang TY, He P, Yan L, Jiao ZX. Modeling, simulation and  
920 experiment study of electromagnetic performance for E-type series  
921 linear oscillating motor *Proceedings of IEEE international confer-*  
922

- 923           ence on advanced intelligent mechatronics, 2015 Jul 7–11, Busan,  
924           Korea. p. 607–12.
- 925 26. Jiao ZX, Wang TY, Yan L. Design of a tubular linear oscillating  
926           motor with novel compound halfbach magnet array. *IEEE/ASME*  
927           *Trans Mechatron* 2016;**22**(1):498–508.
- 928 27. Wang JB, Howe D. Tubular modular permanent-magnet machi-  
929           nes equipped with quasi-halfbach magnetized magnets-part I:  
930           Magnetic field distribution, emf, and thrust force. *IEEE Trans*  
931           *Magn* 2005;**41**(9):2470–8.
- 932 28. Wang TY, Yan L, Jiao ZX, He P. Analytical modeling of linear  
933           oscillating motor with a mixed method considering saturation  
934           effect. *Sens Actuators A – Phys* 2015;**234**:375–83.
- 935 29. Jang S, Choi J, You D. Dynamic performance of tubular linear  
936           actuator with halfbach array and mechanical spring driven by pwm  
937           inverter. *IEEE Trans Magn* 2006;**42**(10):3518–20.
- 938 30. Karunanithi R, Jacob S, Singh GAS, Damu C, Das M. Develop-  
939           ment of moving magnet type linear motor for dual piston  
940           compressor for pulse tube cryocooler. *Adv Cryogenic Eng: Trans*  
941           2012;**1434**(1):525–31.
- 942 31. Nowak L. Dynamic FE analysis of quasi-axisymmetrical elec-  
943           tromechanical converters. *IEEE Trans Magn* 1994;**30**(5):3268–71.
- 944 32. Sadowski N, Carlson R, Beckert AM, Bastos JPA. Dynamic  
945           modeling of a newly designed linear actuator using 3d edge  
946           elements analysis. *IEEE Trans Magn* 1996;**32**(3):1633–6.
- 947 33. Tomczuk B, Sobol M. A field-network model of a linear oscillating  
948           motor and its dynamics characteristics. *IEEE Trans Magn* 2005;**41**  
949           (8):2362–7.
- 950 34. Ji JH, Yan SJ, Zhao WX, Liu GH, Zhu XY. Minimization of  
951           cogging force in a novel linear permanent-magnet motor for  
952           artificial hearts. *IEEE Trans Magn* 2013;**49**(7):3901–4.
- 953 35. Kim KH, Park HI, Jeong SS, Jang SM, Choi JY. Comparison of  
954           characteristics of permanent-magnet linear oscillating actuator  
955           according to laminated method of stator core. *IEEE Trans Appl*  
956           *Supercond* 2016;**26**(4):1–4.
- 957 36. Wang TY, Jiao ZX, Yan L, Chen CY, Chen IM. Design and  
958           analysis of an improved halfbach tubular linear motor with non-  
959           ferromagnetic mover tube for direct-driven EHA *Proceedings of*  
960           *IEEE chinese guidance, navigation and control conference, 2014 Oct*  
961           *8–10, Yantai, China.* p. 797–802.
- 962 37. He P, Jiao ZX, Yan L, Liang HS. Analysis of magnet layout in  
963           circumferential and axial direction for halfbach PM arrays *Pro-*  
964           *ceedings of guidance, navigation and control conference, 2014 Oct 8–*  
965           *10, Yantai, China.* p. 2013–8.
- 966 38. He P, Yan L, Jiao ZX, Wang TY. Design of novel double-layer  
967           compound stator for tubular linear oscillating motor *Proceedings*  
968           *of 2015 IEEE 10th conference on industrial electronics and*  
969           *applications (ICIEA), 2015 Jun 15–17, Auckland, New Zealand.*  
970           p. 1910–5.
- 971 39. Xia CL, Guo L, Wang H. Modeling and analyzing of magnetic  
972           field of segmented halfbach array permanent magnet machine  
973           considering gap between segments. *IEEE Trans Magn* 2014;**50**  
974           (12):1–9.
- 975 40. Gu QS, Gao HZ. Effect of slotting in PM electric machines. *Electr*  
976           *Mach Power Syst* 1985;**10**(4):273–84.
- 977 41. Tomczuk B, Schroder G, Waindak A. Finite-element analysis of  
978           the magnetic field and electromechanical parameters calculation  
979           for a slotted permanent-magnet tubular linear motor. *IEEE Trans*  
980           *Magn* 2007;**43**(7):3229–36.
- 981